



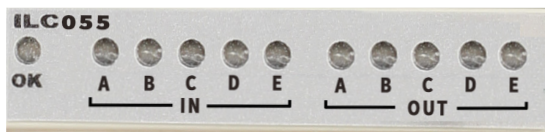

# InfinityLink ILC055

## 10 Port HD-BNC Expansion Module

The ILC055 is for use in the IL6000 chassis and requires IL Manager for configuration and operation.

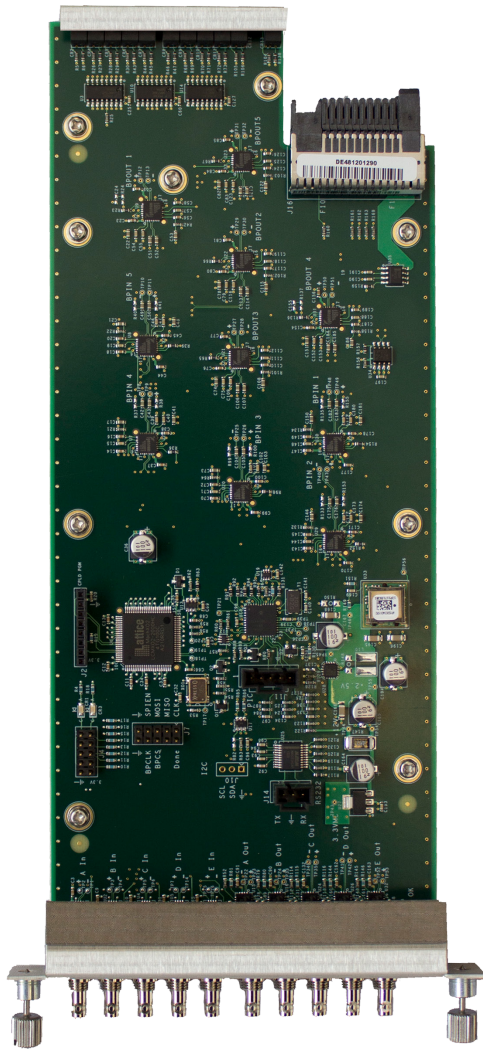

### ILC055 FRONT PANEL LEDS

LED	Function	Color	Description
OK	Module Status	OFF	No power or fault.
		Green	Normal operation.
		Yellow	Minor alarm.
Video In A,B,C,D,E	Input Port Status	Red	Major alarm.
		OFF	No Signal.
		Green	Valid video signal. 3G, HD, SDI/ASI detected.
Video Out A,B,C,D,E	Output Port Status	Yellow	Signal input, other rate.
		OFF	No signal, or port disabled.
		Green	Valid video output. 3G, HD, SDI/ASI output.
		Yellow	Signal output, unreclocked.

### ILC055 REAR PANEL LEDS

LED	Function	Color	Description
OK	Module Status	OFF	No power or fault.
		Green	Normal operation.
		Yellow	Minor alarm.
		Red	Major alarm.



When operating a port with a signal whose bit rate is less than 270 Mb/s, the port must be set to bypass mode through IL Manager.